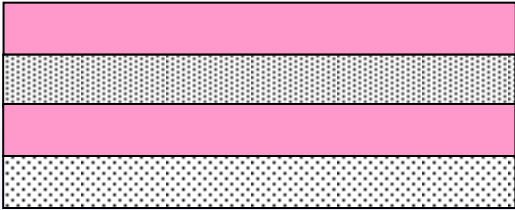



<p>Structure</p>	 <p>← Acrylic adhesive ← Non woven fabric ← Acrylic adhesive ← Release liner(GA808 printed)</p> <p>} Tape Thickness 140 micro m</p>					
<p>Features</p>	<p>1) Excellent initial adhesion and component bonding performance. 2) Excellent bonding performance to various substrates. 3) Can be used at low temperature. 4) Superior durability, converting performance and Liner peel ability.</p>	<p>Excellent Initial adhesion & Durability</p>				
<p>Properties</p>	<table border="1"> <tr> <td>· Thickness[mm]</td> <td>0.14</td> </tr> <tr> <td>· 180 degree peeling adhesion[N/20mm] (to stainless steel plate)</td> <td>15</td> </tr> </table>	· Thickness[mm]	0.14	· 180 degree peeling adhesion[N/20mm] (to stainless steel plate)	15	
· Thickness[mm]	0.14					
· 180 degree peeling adhesion[N/20mm] (to stainless steel plate)	15					
<p>Applications</p>	<ul style="list-style-type: none"> · Fixing of metal, plastic and name plate. · Fixing of various foam and cushioning material. 	<p>GA808</p>				

Contact e-mail address

tcat@nitto.co.jp

Toyohashi plant, JAPAN

SB-143_E