


# 3M™ Acrylic Plus Tape Series EX4500

## Technical Data Sheet

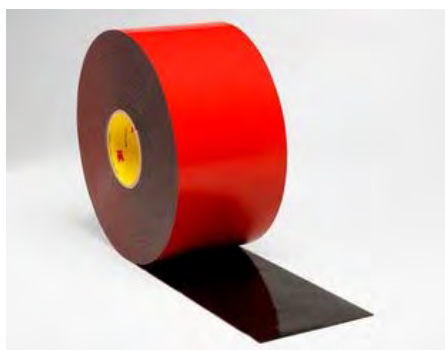

3M™ Acrylic Plus Tape Series EX4500 is a series of deep black, double-coated acrylic foam tapes designed for the attachment of automotive exterior trim parts – without the use of adhesion promoter. 3M series EX4500 tapes offer an advanced adhesive system – on both sides of the product – that adheres well to traditional, medium surface energy, and scratch- and mar-resistant automotive paint and polymer systems. The initial product offering will be in the 45 mil (1.1 mm) caliper.

3M series EX4500 tapes offer the following key features:

- Primerless adhesion capability – allowing for adhesion to medium surface energy plastics without the use of adhesion promoter.
- Excellent adhesion to traditional, low surface energy, and scratch and mar resistant automotive paints and medium surface energy plastics on both liner and non-liner sides of the product.
- Unique foam core that provides stress relaxation when high application loads are encountered, while maintaining tight bond-line aesthetics under normal conditions.
- Deep black color which provides excellent bond-line appearance.

Typical applications for 3M series EX4500 tapes include bumper sensors, garnishes, nested components and window visors, and other aftermarket accessories.

## Product Construction



## Liner Options

See the technical update [“3M™ Acrylic Foam and Acrylic Plus Tapes: Product Constructions”](#) for liner and tabbing information.

## Physical Properties

	EX4508	EX4511	EX4515
Thickness Range	N/A	1.14 mm (0.045 in) +/- 0.13 mm (0.005 in)	N/A
Density Range	N/A	592 kg/m <sup>3</sup> (37 lb/ft <sup>3</sup> ) +/- 56 kg/m <sup>3</sup> (3.5 lb/ft <sup>3</sup> )	N/A

## Roll Width and Length

3M™ Acrylic Plus Tapes are available in the following standard widths. Millimeter widths -- rounded to the nearest whole number-- and 1/8-inch increments starting with 1/4 inch.

Minimum widths: 4 mm Levelwound, 5 mm Planetary (Standard versions)

### Planetary

#### EX4511

Roll Width	Roll Width Tolerance	Roll Length (max)
< 8 mm (< 0.276 in)	+/- 0.40 mm (+/-0.015 in)	66 M (72 yds)
8 - 9 mm (0.276 – 0.375 in)	+/- 0.40 mm (+/-0.015 in)	99 M (108 yds)
10 - 18 mm (0.394 – 0.709 in)	+/- 0.40 mm (+/-0.015 in)	132 M (144 yds)
> 18 mm (> 0.709 in)	+/- 0.80 mm (+/- 0.031 in)	132 M (144 yds)

### Levelwound

#### EX4511 - EX4511T

Roll Width	Roll Width Tolerance	Roll Length (max)
4 - 14 mm (0.157 – 0.551 in)	+/- 0.40 mm (+/-0.015 in)	900 M (984 yds)
15 - 16 mm (0.591 – 0.630 in)	+/- 0.40 mm (+/-0.015 in)	700 M (765 yds)




## Performance Properties

Typical performance of 3M™ Acrylic Plus Tape EX4511 is shown below. Peel values depend on plastic substrate characteristics and/or paint composition. These values are for reference only.

### Notes:


1. The following technical information and data is based upon limited 3M testing conditions and should not be used for specification purposes.
2. Care should be taken to make sure the surface is clean and dry prior to application of the tape and not to saturate the tape with strong polar solvents, like alcohols, after initial application.
3. After adhesion build, the JLx adhesive is durable to typical automotive environmental conditions and chemicals and provides a robust attachment solution. For questions regarding the application process, please contact your 3M technical service representative.
4. When using solvents, extinguish all ignition sources, including pilot lights and follow the manufacturer's precautions and directions for use.

## 90° Peel Adhesion Testing

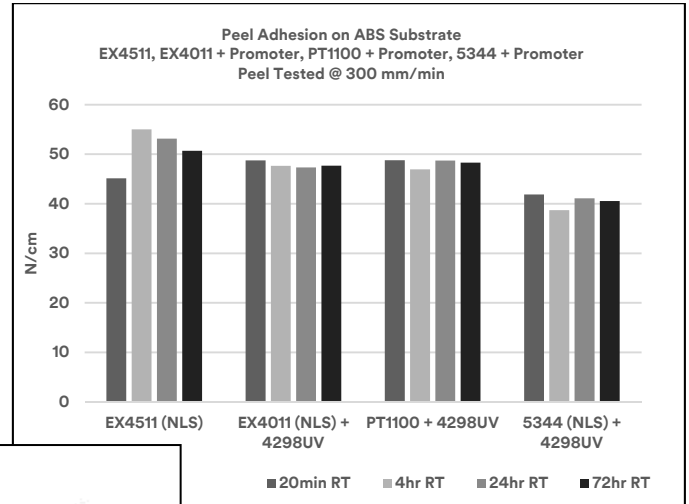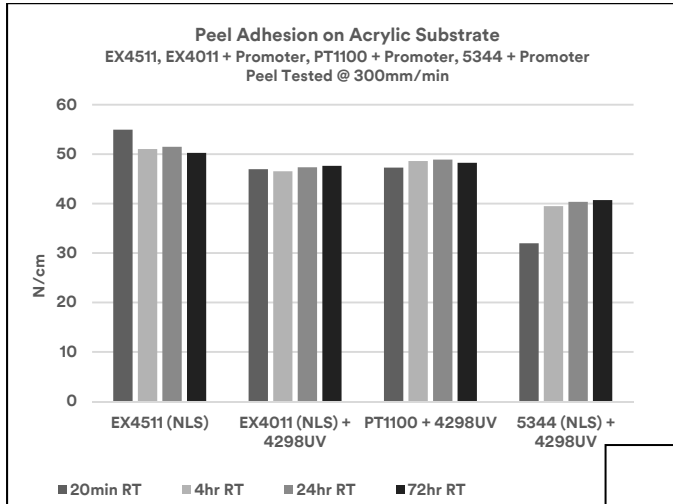

Note: 4298UV is a 3M™ Adhesion Promoter

## Static Shear Performance

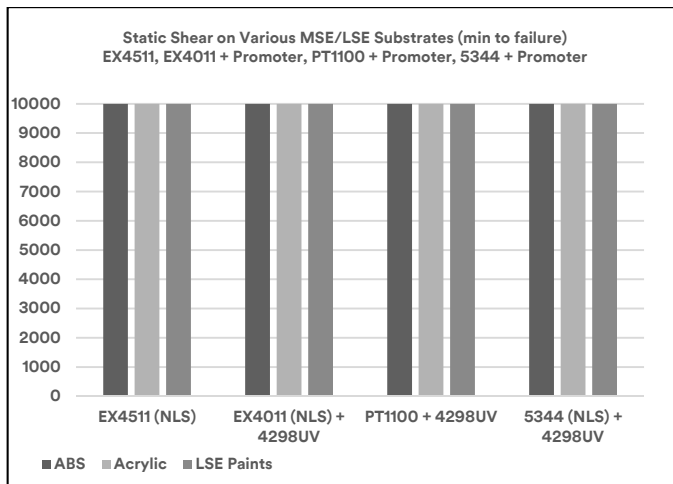

Static Shear Sample 1"x1"  
 24hr RT dwell – 500g @ 80C Test  
 No adhesion promoter used in LSE paint testing  
 Testing complete after 10k mins

Note: 4298UV is a 3M™ Adhesion Promoter

## Substrate Recommendations

Typical performance of 3M™ Acrylic Plus Tape EX4511 above is on Medium Surface Energy (MSE) substrates. Refer to the table for indications on most suitable substrates for use with 3M tape EX4511. Please speak with a 3M technical service representative when using very low surface energy substrates such as RIM, PP or TPO.

EX4500 Recommended Substrate Matrix		
Paints	Medium to High Surface Energy	
	Low Surface Energy	
Plastics	ABS	
	Acrylic	
	AES	
	ASA	
	Polycarbonate	
	PC/ABS	
	PMMA	
	RIM	
	Nylon	
	TPO, PP/EPDM, PP	
	Recommended	
	Contact your 3M technical service representative	

## Shelf Life

One year from date of manufacture when stored at 4°C - 38°C (40°F - 100°F) and 0-95% relative humidity (RH). The optimum storage conditions are 22°C (72°F) and 50% relative humidity.

## Regulatory Information

Please refer to the product label and Safety Data Sheet (SDS) for health and safety information before using. Observe proper handling precautions as outlined in the SDS, which is available on request or at [www.3M.com/msds](http://www.3M.com/msds).

The product is published as a material entry and is available for access on [www.mdssystem.com](http://www.mdssystem.com). For product IMDS ID number, email requests to [3M-IMDSrequest@mmm.com](mailto:3M-IMDSrequest@mmm.com).

## Contact Information

The information provided in this technical document is intended as a guide for this product. For more information or help in selecting a 3M product for an application, please contact your 3M technical service representative or call 1-800-328-1684.

**Technical Information:** The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

**Product Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

**Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



### Automotive Division

3M Center  
St. Paul, MN 55144-1000  
Phone 1-800-328-1684  
Web [www.3M.com/autosolutions](http://www.3M.com/autosolutions)

3M is a trademark of 3M Company  
Please recycle. Printed in USA.  
© 3M 2016. All rights reserved.