



PS-1541

Product Description:

P-THERM® PS-1541 is an ultra-soft silicone based thermally conductive gap filler with an embedded fiberglass support and 125 micron removable polyester carrier.


Construction / Properties:

Property	Value	Test Method
Color	Gray	Visual
Carrier Type	Polyester Film	--
Carrier Thickness	125 micron	--
Thickness Range	0.5 mm - 5.0 mm	ASTM D374
Thermal Conductivity	1.0 W/m K	ASTM D5470
Dielectric Breakdown Strength	>5 kV _{AC}	ASTM D149
Hardness (Shore 00)	5	ASTM D2240
Continuous Use Conditions	-60 - 200 C	QSP-754
Flammability Rating	V-0	UL 94

Features:

- Good Thermal Conductivity
- Excellent Compression Characteristics
- Excellent Wet-Out
- Superb Flexibility
- Excellent Converting Properties
- RoHS and HF Compliant

Ultra-Soft Silicone
with Embedded
Fiberglass Support
Polyester Carrier

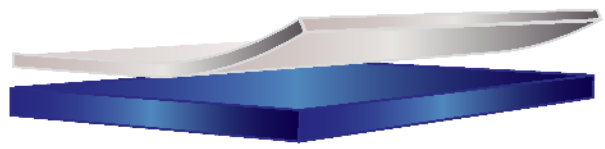

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:
 E-mail: sales@polymerscience.com
 Toll Free: +1 888.533.7004
 Web: www.polymerscience.com
 Revision: 032519



www.marianinc.com
 1-800-773-0062



SCIENCE, INC.