



PS-1595

Product Description:

P-THERM® PS-1595 is a non-silicone, thermally conductive tacky phase change material with a siliconized paper release liner.

Construction / Properties:

Property	Value	Test Method
Color	Yellow	Visual
Tackifier	Proprietary Block Copolymer	--
Total Thickness Range (excluding liners)	0.25mm - 0.3mm	ASTM D374
Thermal Conductivity	4.0 W/m K	ASTM D5470
Dielectric Breakdown Strength	4 kV _{AC}	ASTM D149
Phase Change Temperature	55 C	--
Continuous Use Conditions	-60 - 93 C	QSP-754


Features:

- Good Thermal Conductivity
- Low Dripping
- Tacky for Easy Use
- Excellent Converting Properties

0.25mm Thickness

Pressure (psi)	Impedance (K-cm ² /W)
5	1.879
10	1.238
20	1.006
30	0.797
40	0.699
50	0.659

Non-Silicone Phase Change

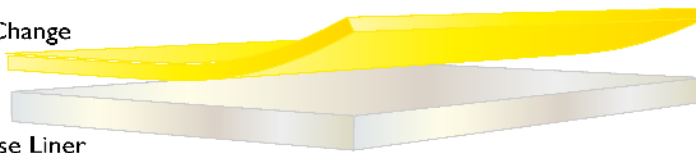

Siliconized Paper Release Liner

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 040319



www.marianinc.com
1-800-773-0062

