

PF20 SERIES

Norseal® PF20 Series, Micro-Cellular Polyurethane Foams



Norseal PF20 Series features enhanced micro-cellular polyurethane foam solutions, specifically developed for efficient functioning of batteries in a pack. PF25 and PF27 are available in thickness as low as 1 mm, which aids in achieving higher energy density in a pack.

Uniformity of cell temperature and cell pressure is needed for a long battery life. The compressed foam between cells creates uniform pressure over the cell surface. The thermal insulation properties of the foam also help to maintain the cell face temperature. These properties and resulting function of the foam is very consistent over time and over a range of environmental conditions, ensuring a long life for the pack.

The key to performance is seen in the Compression Force Deflection (CFD) curve. **Norseal** PF cushion pads provide a flat CFD curve over a wide range of deflection, as shown here.

APPLICATIONS

- Compression/tolerance pads in lithium-ion pouch and prismatic cell packs
- Intricate area gasketing

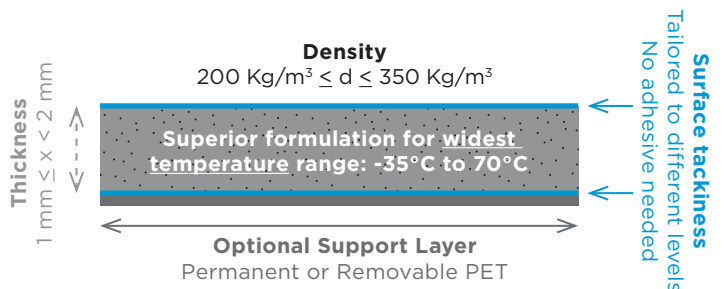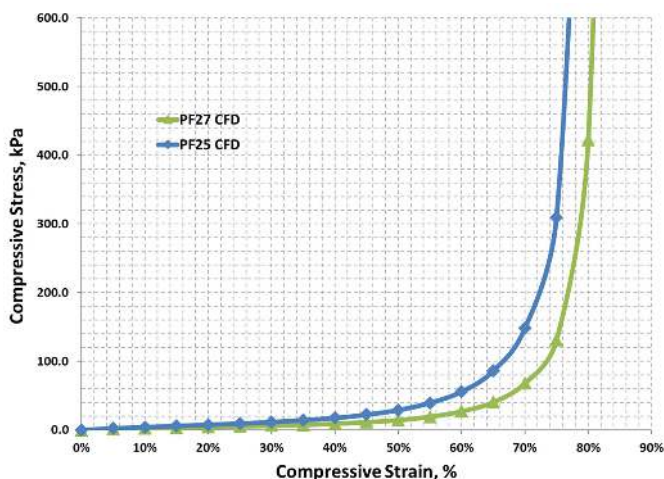

Norseal PF20 Series — Properties

Performance tests are run using standard test procedures. The values presented are typical values and should not be used for specification purposes.

Properties	Test Method	PF25	PF27
PHYSICAL			
Density, kg/m ³ (lb/cu.ft.)	ASTM D3574	250 (16)	200 (12.5)
Shrink, %		<2	
Thickness, mm (in)		1.0 - 1.25 - 1.6 (0.04 - 0.05 - 0.06)	
Usable width, mm	-	1360	
Standard color	-	Black	
Standard liner	-	Paper	
Compression set (@ 70%, 7 days), %	ASTM D1667	<3 @ 23°C (73°F) <3 @ 70°C (158°F)	<3 @ 23°C (73°F) <3 @ 60°C (140°F)
Typical Compression force deflection, kPa (psi) 50 mm/min @ 30% deflection	ASTM D1667	16	7

THERMAL

Temperature resistance, °C (°F)	Recommended constant use, max. Recommended intermittent, max.	70 (158) 121 (250)	
Thermal Conductivity, @ 50%, W/M-C	ISO 8302	0.07	0.06
Low temperature cold flex	-40°C w/25 mm mandrel	Pass	

ELECTRICAL (on nominal 1 mm thick material)

Surface resistivity, ohm/sq	ASTM D257	6.5 × 10 ¹²	6.6 × 10 ¹²
Volume resistivity, ohm.cm	ASTM D257	2.9 × 10 ¹¹	1.4 × 10 ¹¹
Breakdown strength, AC, kV/mm (V/mil)	ASTM D149, Method B, @ 10%	3.2 (81.4)	1.7 (42.2)
Breakdown strength, DC, kV/mm (V/mil)	ASTM D3755 @ 10%	4.2 (106.5)	2.6 (66.2)

FLAME

Flame resistance	ASTM D4986 (self extinguishing)	Pass	
Glow wire test, GWFI, C	IEC 60695	650	

Shelf Life

24 months from the date of sales when stored at 21°C, 50% relative humidity, when product is stored in its original packaging, away from direct sources of heat and sunlight.

**Saint-Gobain Tape Solutions**

North America | South America | Europe | Asia

For a full list of locations, please visit
tapesolutions.saint-gobain.com/contact-us

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. Saint-Gobain assumes no responsibility for any product failures that occur due to misuse of the materials it provides arising out of the design, fabrication or application of the products into which the materials are incorporated.

WARRANTY: For a period of 6 months, Saint-Gobain warrants this product(s) to be free from defects in manufacturing. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. SAINT-GOBAIN DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Form #1574 | © Saint-Gobain May 2022 | Norseal and Saint-Gobain are trademarks of Saint-Gobain.