


PF27 SERIES

Norseal® PF27 Series, Micro-Cellular Polyurethane Foams

Norseal PF27 Series features enhanced micro-cellular polyurethane foam solutions, specifically developed for efficient functioning of batteries in a pack.

Uniformity of cell temperature and cell pressure is needed for a long battery life. The compressed foam between cells creates uniform pressure over the cell surface. The thermal insulation properties of the foam also help to maintain the cell face temperature. These properties and resulting function of the foam are very consistent over time and over a range of environmental conditions, ensuring a long life for the pack.


The key to performance is seen in the Compression Force Deflection (CFD) curve. **Norseal** PF cushion pads provide a flat CFD curve over a wide range of deflection, as shown here.

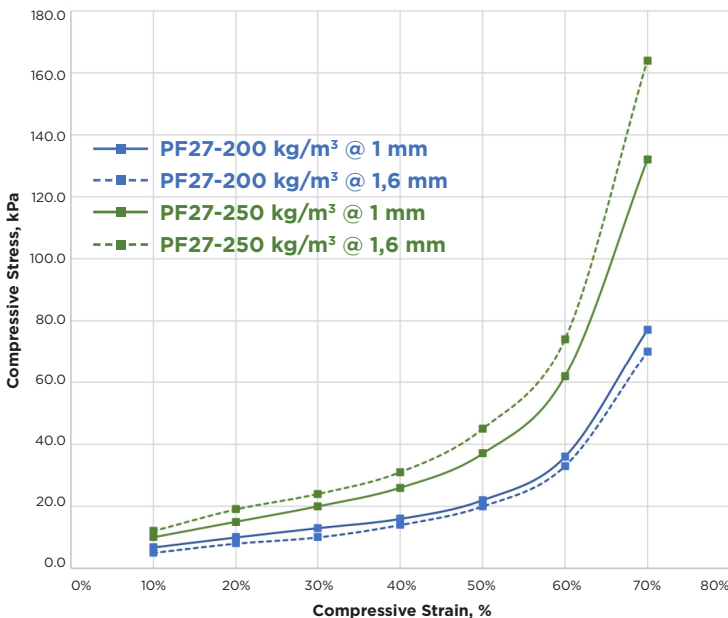

Measurements are based on preliminary trials meant for informative purposes and not specification on design.

APPLICATIONS

- Compression/tolerance pads in lithium-ion pouch and prismatic cell packs
- Cushioning and insulation for thermistors in lithium-ion battery packs

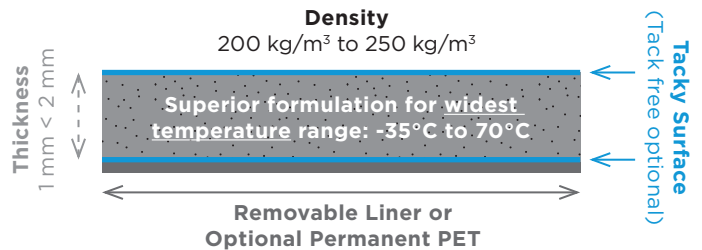

Norseal PF27 Series – Properties

Performance tests are run using standard test procedures. The values presented are typical values and should not be used for specification purposes.

Properties	Test Method	PF27-200	PF27-250
PHYSICAL		Typical Value	
Density, kg/m ³ (lb/ft. ³)	ASTM D3574	200 (12.5)	250 (15.6)
Shrinkage, %		<2	
Thickness, mm (in)		1.0 - 2.0 (0.04 - 0.08)	
Thickness tolerances (%)		+/- 15	
Usable width, mm	-	1360	
Standard color	-	Black	
Standard liner	-	Paper	
Compression set (@ 70%, 7 days), %	D395	<5 @ 23°C (73°F) <10 @ 70°C (158°F)	
Typical compression force deflection, kPa (psi) 50 mm/min @ 30% deflection	ASTM D1667	15 (2.1)	23 (3.3)
THERMAL			
Temperature resistance, °C (°F)	Recommended constant use, max. Recommended intermittent, max.	70 (158) 121 (250)	
Thermal conductivity, W/mK	ASTM C518 (10% compression)	0.03	0.03
Low temperature cold flex	-40°C w/25 mm mandrel	Pass	
ELECTRICAL			
Surface resistivity, ohm/sq	ASTM D257	1 × 10 ¹⁰	1 × 10 ¹¹
Volume resistivity, ohm.cm	ASTM D257	1 × 10 ¹¹	
Breakdown strength, DC, kV/mm (V/mil)	ASTM D3755 @ 10%	2.0 (50.8)	2.2 (55.8)
FLAME			
Resistance	ASTM D4986 (self extinguishing equivalent to UL94-HBF)	Pass	

Options (subject to minimum order requirements)

- Please note that density can be optimized upon customer requirements. Higher density (increased stiffness/CFD) possible up to 330 kg/m³
- Custom thickness (from 1 mm to 2 mm)
- Tack-free surface
- Permanent or removable PET liner
- Acrylic based adhesive



www.marianinc.com
1-800-773-0062



Shelf Life

Foam without adhesive: 24 months from the date of sales when stored at 21°C, 50% relative humidity, when product is stored in its original packaging, away from direct sources of heat and sunlight.

Foam with adhesive: 12 months from the date of sales when stored at 21°C, 50% relative humidity, when product is stored in its original packaging, away from direct sources of heat and sunlight.

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. Saint-Gobain assumes no responsibility for any product failures that occur due to misuse of the materials it provides arising out of the design, fabrication or application of the products into which the materials are incorporated.

WARRANTY: For a period of 6 months, Saint-Gobain warrants this product(s) to be free from defects in manufacturing. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. SAINT-GOBAIN DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Form #1574 | © Saint-Gobain March 2024 | All the mentioned trademarks are registered trademarks of Saint-Gobain Tape Solutions or affiliates, part of Saint-Gobain group.