

## Fujipoly Data Sheet

# SARCON YR-a series


## Higher Performance Rubber Type

### FEATURES

Thin Film with Higher Thermal Conductivity , Electric Isolation and Non-Flammable.

- SARCON YR-a is available in die-cut Gaskets, extrusion shapes and more with desired designs.
- UL 94 V-0 and UL 746 150°C certified.

### CONSTRUCTIONS

Series	Characteristics	Constructions
SARCON YR-a	Fine heat conductive particles are mixed with insulative silicone rubber to produce this excellent insulative, high heat conductive silicone material : 2.2W/m-K (by Hot Wire)	 Plain Type

### THERMAL RESISTANCE

Unit : K-cm<sup>2</sup>/W (K-in<sup>2</sup>/W)

Compression Force	20Y-a (0.2mmT)	30Y-a (0.3mmT)	45Y-a (0.45mmT)	85Y-a (0.85mmT)
1.5MPa	1.35 (0.20)	2.01 (0.31)	2.50 (0.38)	4.28 (0.66)
2.5MPa	1.34 (0.20)	2.04 (0.31)	2.44 (0.37)	4.24 (0.65)
3.6MPa	1.26 (0.19)	1.93 (0.29)	2.41 (0.37)	4.07 (0.63)

#### 1. Test Method by FTM P-3070

Fujipoly test method FTM P-3070 which gives ASTM D5470 equivalent value. The sample is sandwiched between aluminum blocks with thermocouples installed, screwed with a specified torque, constant power is applied to the heater to generate constant heat, and the thermal resistance value is measured from the temperature difference between the upper and lower thermocouples.

#### 2. Principle

A thermal impedance is given by the equation below.

$$Rt = (Tc - Tf) \times S / P0$$

Rt : Thermal resistance (K-cm<sup>2</sup>/W)


Tc : T1 temperature(K)

Tf : T2 temperature(K)

S : Sample installation area(cm<sup>2</sup>)

P0 : Electric power(W)

#### Measurement diagram

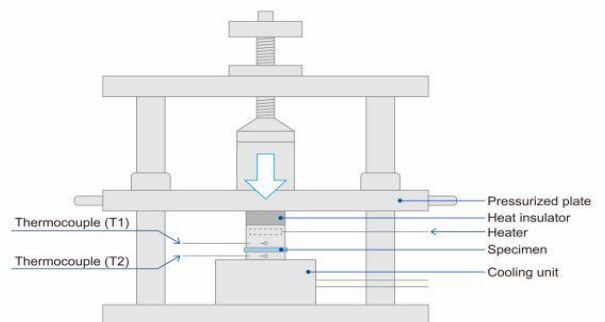

**TYPICAL PROPERTIES**

Properties	unit	YR-a				Test method		
		20Y-a	30Y-a	45Y-a	85Y-a			
Physical Properties	Color	-	Dark Gray				Visual	
	Thickness	mm	0.2 ±0.05	0.3 +0.1/-0	0.45 ±0.05	0.85 ±0.05	ISO 463:2006	
	Specific Gravity	-	2.6				ASTM D792	
	Hardness Highest Value	IRHD	85	86	89	87	ISO 7619	
	Tensile Strength	MPa	14.2	4.5	4.6	4.0	ASTM D412	
		psi	2059	652	667	580		
Elongation	%	50	73	80	80	ASTM D412		
Electrical Properties	Volume Resistivity	Ohm-m	1x10 <sup>12</sup>	1x10 <sup>13</sup>	1x10 <sup>13</sup>	1x10 <sup>13</sup>	ASTM D257	
	Breakdown Voltage	kV(AC)	6	10	11	14	ASTM D149	
	Dielectric Strength	kV(AC)	3	7	8	10	ASTM D149	
	Dielectric Constant	-	50Hz	-	6.2	6.3	6.0	ASTM D150
			1kHz	-	5.8	5.9	5.7	
			1MHz	-	5.6	5.7	5.4	
	Dissipation Factor	-	50Hz	-	0.030	0.030	0.028	ASTM D150
1kHz			-	0.025	0.025	0.023		
1MHz			-	0.010	0.010	0.010		
Thermal Properties	Thermal Conductivity	W/m-K	2.2				ASTM D2326 (Hot Wire)	
	Recommended Operating Temp.	°C	-40 to +150				-	
		°F	-40 to +302					
	Relative Thermal Index	°C	150				UL 746	
Flame Retardant	UL94	V-0				UL 94		

**DURABILITY****Heat Aging Test : 150°C (300°F)**

Properties	unit	30Y-a			45Y-a			85Y-a		
		Before	500hrs	1,000hrs	Before	500hrs	1,000hrs	Before	500hrs	1,000hrs
Hardness	IRHD	86	93	94	89	93	94	87	93	95
Tensile Strength	Mpa	4.5	5.3	5.3	4.6	5.0	5.0	4.0	4.0	4.5
Elongation	%	73	50	40	80	65	50	80	65	50
Volume Resistivity	Ohm-m	1x10 <sup>13</sup>	1x10 <sup>13</sup>	1x10 <sup>13</sup>	7x10 <sup>12</sup>	1x10 <sup>13</sup>	1x10 <sup>13</sup>	6x10 <sup>12</sup>	2x10 <sup>13</sup>	1x10 <sup>13</sup>
Breakdown Voltage	kV	10	9	10	11	11	12	14	15	16
Dielectric Constant	50Hz	6.2	6.2	6.4	6.3	6.3	6.1	6.0	6.5	6.5
	1kHz	5.8	5.8	6.0	5.9	5.9	5.7	5.7	6.2	6.2
	1MHz	5.6	5.6	5.8	5.7	5.7	5.5	5.4	5.9	5.9
Dissipation Factor	50Hz	0.030	0.029	0.028	0.030	0.029	0.029	0.028	0.029	0.028
	1kHz	0.025	0.024	0.024	0.025	0.024	0.025	0.023	0.025	0.025
	1MHz	0.010	0.010	0.006	0.010	0.010	0.010	0.010	0.011	0.010

**Heat Aging Test : 200°C (390°F)**

Properties	unit	30Y-a			45Y-a			85Y-a		
		Before	500hrs	1,000hrs	Before	500hrs	1,000hrs	Before	500hrs	1,000hrs
Hardness	IRHD	86	98	99	89	98	98	87	98	99
Tensile Strength	Mpa	4.5	5.9	5.6	4.6	5.4	5.4	4.0	4.7	4.7
Elongation	%	73	30	20	80	30	20	80	35	22
Volume Resistivity	Ohm-m	1x10 <sup>13</sup>	2x10 <sup>13</sup>	3x10 <sup>13</sup>	7x10 <sup>12</sup>	2x10 <sup>13</sup>	2x10 <sup>13</sup>	6x10 <sup>12</sup>	2x10 <sup>13</sup>	3x10 <sup>13</sup>
Breakdown Voltage	kV	10	10	10	11	12	11	14	16	14
Dielectric Constant	50Hz	6.2	6.1	6.4	6.3	6.1	6.1	6.0	6.3	6.5
	1kHz	5.8	5.8	6.0	5.9	5.8	5.7	5.7	5.9	6.2
	1MHz	5.6	5.5	5.8	5.7	5.5	5.5	5.4	5.7	5.9
Dissipation Factor	50Hz	0.030	0.028	0.028	0.030	0.028	0.029	0.028	0.028	0.028
	1kHz	0.025	0.024	0.024	0.025	0.024	0.025	0.023	0.024	0.025
	1MHz	0.010	0.010	0.006	0.010	0.010	0.010	0.010	0.010	0.010

**Humidity Test : 60°C (140°F) / 95%RH**

Properties	unit	30Y-a			45Y-a			85Y-a		
		Before	250hrs	500hrs	Before	250hrs	500hrs	Before	250hrs	500hrs
Hardness	IRHD	86	88	89	89	89	90	87	89	92
Tensile Strength	Mpa	4.5	4.5	4.5	4.6	4.4	4.4	4.0	4.0	4.0
Elongation	%	73	75	75	80	75	75	80	75	75
Volume Resistivity	Ohm-m	1x10 <sup>13</sup>	3x10 <sup>12</sup>	3x10 <sup>12</sup>	7x10 <sup>12</sup>	3x10 <sup>12</sup>	3x10 <sup>12</sup>	6x10 <sup>12</sup>	4x10 <sup>12</sup>	4x10 <sup>12</sup>
Breakdown Voltage	kV	10	9	10	11	12	12	14	16	16
Dielectric Constant	50Hz	6.2	6.4	6.4	6.3	6.5	6.4	6.0	6.4	6.6
	1kHz	5.8	6.0	6.0	5.9	6.0	5.0	5.7	6.0	6.2
	1MHz	5.6	5.7	5.7	5.7	5.7	4.8	5.4	5.7	5.9
Dissipation Factor	50Hz	0.030	0.035	0.036	0.030	0.035	0.035	0.028	0.032	0.034
	1kHz	0.025	0.029	0.029	0.025	0.028	0.029	0.023	0.026	0.028
	1MHz	0.010	0.011	0.011	0.010	0.011	0.011	0.010	0.011	0.011

## **HANDLING NOTES**

- It is recommended to compress the material with the equal ratio on the whole surface. Partial excessive stress may also result in excessive silicone oil exudation.

## **WARRANTY STATEMENT**

- Properties of the products may be revised due to some changes for improving performance.
- Properties values in this document are not specification or guaranteed.
- This product is made of silicone, and silicone oil may exude from the product.
- This product is made of silicone, and low molecular siloxane may vaporize depending on operating conditions.
- The product is designed, developed, and manufactured for general industrial use only. Never use for medical, surgical, and/or relating purposes. Never use for the purpose of implantation and/or other purposes by which a part of or whole product remains in human body.
- Before using, a safety must be evaluated and verified by the purchaser.
- Contents described in the document do not guarantee the performances and qualities required for the purchaser's specific purposes. The purchaser is responsible for pre-testing the product under the purchaser's specific conditions and for verifying the expected performances.
- Statements concerning possible or suggested uses made herein may not be relied upon, or be constructed, as a guaranty of no patent infringement.
- Copyright© 2022 Fujipoly

