

3M™ Optically Clear Adhesive

CEF08XX (821X/818X) Series

- General purpose adhesive
- Easy converting for good edge quality

Product Description

3M™ Optically Clear Adhesives: Optically clear adhesive for bonding smooth or textured, transparent substrates.

3M CEF08XX is recommended for general purpose, non-touch applications. No UV curing is required.



Construction

Product	3M CEF0801 (8211)	3M CEF0802 (8212)	3M CEF0803 (8213)	3M CEF0804 (8214)	3M CEF0805 (8215)	3M CEF0806 (8216)	3M CEF0807 (8217)
Adhesive Type:	Acrylic	Acrylic	Acrylic	Acrylic	Acrylic	Acrylic	Acrylic
Adhesive Carrier:	None	None	None	None	None	None	None
Approximate Thickness:							
Release Liner:	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester
Adhesive:	25 um (1 mils)	50 um (2 mils)	75 um (3 mils)	100 um (4 mils)	125 um (5 mils)	150 um (6 mils)	175 um (7 mils)
Release Liner:	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester

The 3M family of optically clear adhesives for electronic displays are usually available in two forms. 3M OCA come in roll good form. 3M Contrast Enhancement Films (CEF) are available in die-cut form.

Product	3M CEF0808 (8218)	3M CEF0809 (8219)	3M CEF0810 (8180)	3M CEF0812 (8182)	3M CEF0814 (8184)
Adhesive Type:	Acrylic	Acrylic	Acrylic	Acrylic	Acrylic
Adhesive Carrier:	None	None	None	None	None
Approximate Thickness:					
Release Liner:	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester
Adhesive:	200 um (8 mils)	225 um (9 mils)	250 um (10 mils)	275 um (12 mils)	300 um (14 mils)
Release Liner:	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester	50 um (2 mils) Polyester

Typical Physical Properties and Performance Characteristics

Note: the following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Performance to Environmental Conditions:

The following environmental tests were conducted in the 3M laboratory under the conditions specified without any appreciable deterioration in visible appearance (no bubbles, delamination, etc.). Sample construction is cover glass/3MCEF08 (821X/818X)/PET

Substrate	Condition	Duration
High Temperature	+95°C	800 hours
Low Temperature	-40°C	500 hours
High Temp/ Humidity	+65°C at 90% R.H.	800 hours
Thermal Shock	-40°C and +85°C (1 hour dwell, <1min ramp time)	500 hours
UV	0.55 W/m ² at 340nm, Daylight filter	500 hours

Peel Adhesion:

ASTM D3330 modified, 180 degree peel to various surfaces, 12 in/min (305 mm/min), 2.0 mil polyester backing

	3M CEF0802 (8212)	3M CEF0805 (8215)	3M CEF0807 (8217)	3M CEF0808 (8218)	3M CEF0809 (8219)	3M CEF0810 (8180)
	N/cm	N/cm	N/cm	N/cm	N/cm	N/cm
20 min dwell at RT:						
Stainless Steel	6.3	7.1	6.6	7.3	7.0	9.0
Glass	6.5	7.6	7.3	8.8	8.6	9.8
Acrylic	4.5	6.2	5.6	6.3	6.7	6.7
Polycarbonate	4.6	5.5	5.1	4.7	4.9	6.2
72 hr dwell at RT:						
Stainless Steel	8.4	10.5	10.1	10.8	10.9	10.6
Glass	7.9	9.2	9.3	10.6	9.8	10.6
Acrylic	5.6	7.2	7.3	7.2	8.1	8.3
Polycarbonate	5.8	7.8	7.1	7.0	7.9	8.0

Color:

ASTM E 1164-07/CIELAB, 3M CEF08XX (821X/818X) on LCD glass
(BYK Gardner TCS Plus Spectrophotometer, Model 8870)

3M CEF0802 (8212)	3M CEF0805 (8215)	3M CEF0807 (8217)	3M CEF0808 (8218)	3M CEF0809 (8219)	3M CEF0810 (8180)
L*=97.11	L*=97.12	L*=97.12	L*=97.11	L*=97.13	L*=97.12
a*=-0.02	a*=-0.05	a*=-0.04	a*=-0.05	a*=-0.05	a*=-0.05
b*=0.15	b*= 0.19	b*= 0.18	b*= 0.18	b*= 0.19	b*= 0.20

Refractive Index:

+ 0.0005 measured for Sodium D line @ 25°C

3M CEF0802 (8212)	3M CEF0805 (8215)	3M CEF0807 (8217)	3M CEF0808 (8218)	3M CEF0809 (8219)	3M CEF0810 (8180)
1.475	1.473	1.473	1.473	1.474	1.473

Haze:

Haze is measured according to ASTM D1003-92
3M CEF08XX (821X/818X) on LCD glass

3M CEF0802 (8212)	3M CEF0805 (8215)	3M CEF0807 (8217)	3M CEF0808 (8218)	3M CEF0809 (8219)	3M CEF0810 (8180)
0.1%	0.2%	0.2%	0.2%	0.2%	0.3%

Suggested Lamination Process

Step 1: Remove secondary liner, and then laminate 3M CEF08 (821X/818X) to first adherent substrate by roller at room temperature


Recommendation: roller pressure 0.1 – 0.2 MPa, roller speed 0.5 – 1 m/min

Step 2: Remove primary liner, and then laminate 3M CEF08 (821X/818X)/first adherent to second adherent by vacuum lamination

Recommendation: Vacuum condition < 50 Pa, pressure around 0.1 – 0.2 MPa

Step 3: Autoclave process

Recommendation: 30-60C/3-5kgf/cm²/20-30min

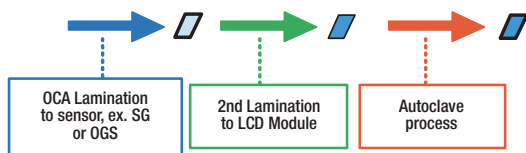

Storage

- Store in original packaging or plastic bag
- Avoid applying pressure or resting objects on the product to prevent marking, denting, or deforming the surface
- Wear gloves to prevent fingerprints or nail marks when handling
- Product needs to be unpacked and handled in a clean-room facility
- Store at room temperature conditions of 22 ± 8°C and 50 ± 20% relative humidity



3M Display Materials & Systems Division

3M Center, Building 235-1E-54
St. Paul, MN 55144-1000 U.S.A.

Phone 1-800-3M HELPS
Web 3M.com/displayfilms



www.marianinc.com
1-800-773-0062

Regulatory

For regulatory information about this product, please contact your 3M representative.

Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use

Many factors beyond 3M's control and uniquely within the user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for user's method of application.

Warranty. Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability

Except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

3M is a trademark of 3M Company.
All other trademarks herein are the property of their respective owners.
© 3M 2018. All rights reserved. dz24166